


STEP BY STEP GUIDE: HOW TO FIX A DERAILLEUR MECH HANGER




1. CHECK FOR DAMAGE

Check derailleur, spokes, chain and cassette for damage, replace if needed

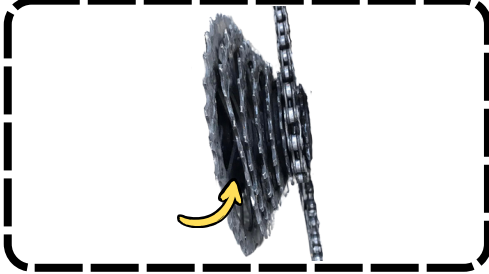

2. REMOVE REAR WHEEL

Undo bolts or loosen the QR skewer and remove the wheel from the bike

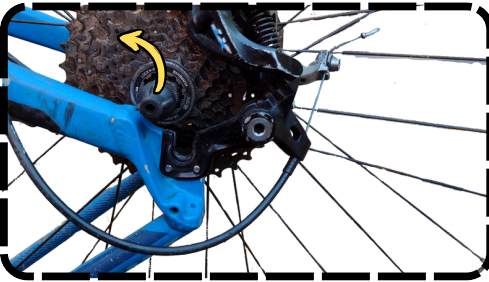


3. REMOVE DAMAGED HANGER

Unscrew all bolts attaching the hanger to derailleur and frame, and discard




4. ATTACH NEW HANGER

Clean frame and attach new hanger to frame, using threadlock fluid on bolts

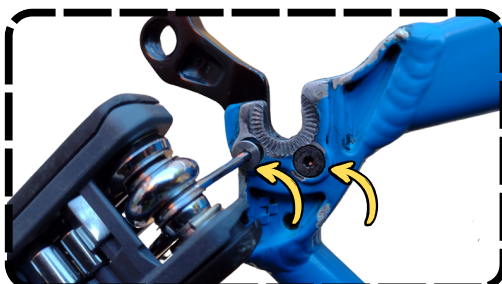

5. ATTACH DERAILLEUR

Attach the derailleur mech to the new hanger using the bolt (greased)

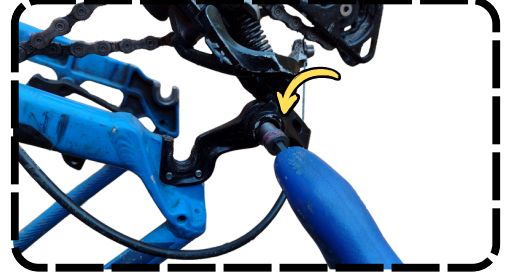


6. REPLACE REAR WHEEL

Replace the rear wheel, tightening the bolts or QR skewer



7. CHECK ALIGNMENT

Check the hanger and derailleur are aligned & gear shifting is smooth

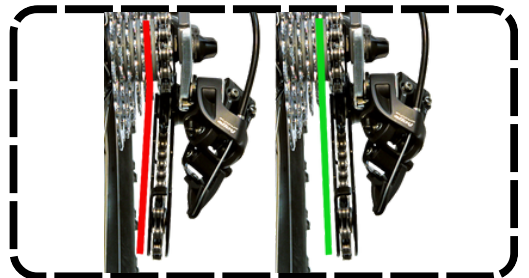

[HOW-TO VIDEO / BUY HANGER](#)

fixmymechhanger.co.uk

SCAN
ME!

